

# Facts and figures


TECHNICAL DATA	SUPER WRAP 650	SUPER WRAP 950
Film (singlewound polyethylene):	up to 4 mil	up to 4 mil
Outside diameter of film roll:	maximum 16"	maximum 16"
Width of film roll:	25" top roll, 24" bottom roll	39" top roll, 36" bottom roll
Clearance in width:	25"	37"
Clearance height, adjustable:	4" – 16" (optional 20")	4" – 16" (optional 20")
Seal system – seal bar with profile contour, continuous heating, temperature thermostat-controlled, with special coating, maintenance free, completely odorless operation:	standard	standard
Conveyor speed variable by means of frequency transformer:	32'–98'/min	32'–98'/min
Pneumatically operated holding-down device:	Stroke 5", height adjustable	Stroke 5", height adjustable
Product length, minimum:	5"	5"
Working height, adjustable:	32" -36"	32" -36"
Power supply:	208-480 V, 3 phase, 60 hz	208-480 V, 3 phase, 60 hz
Rated capacity:	5.0 kW	5.0 kW
Rated current at 400 V:	7.2 amps	7.2 amps
Compressed air supply:	6 bar	6 bar
Compressed air consumption:	appr. 18 l/cycle	appr. 25 l/cycle
Paintwork:	Kalfass Anthracite	Kalfass Anthracite

## Optional equipment features


- Lateral guides in the outfeed area
- Pneumatically actuated flaps in the discharge for alignment of stacked products
- Crane for simpler positioning of heavy film rolls, with swivel mechanism including top stand-by film roll station
- Bottom stand-by film roll station, laterally extending
- Special paintwork finishes, plain colored structure paint

Note: the Kalfass range also contains models with side infeeds and different clearance widths.

## Machine dimensions SUPER WRAP 650 Deluxe Inline

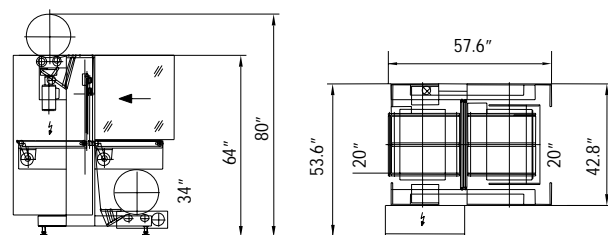

## Machine dimensions SUPER WRAP 950 Deluxe Inline

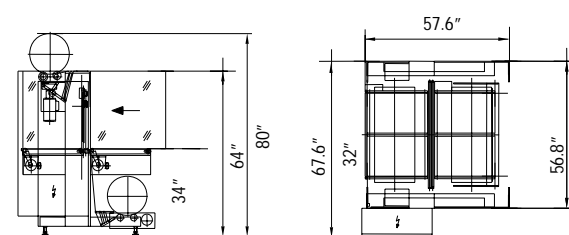

SM650/950-E-01-08 Technical alterations reserved

**Kalfass**  
Packaging Machinery

**CPS & S**  
Complete Packaging Solutions & Systems, Inc.

CPS&S  
1-800-417-3178  
E-Mail: [info@kalfass.com](mailto:info@kalfass.com)  
Internet: [www.kalfass.com](http://www.kalfass.com)





## Fully Automatic Sleeve Wrapper

# SUPER WRAP DELUXE INLINE

The Super Wrap Deluxe Inline sleeve wrapper is characterized not only by its acceptance of a wide variety of applications, but is also impressive in terms of its speed and reliability.

Glass, cans, cartons and boxes, both single and multipack, with and without trays, can be automatically handled at pack rates up to 28 per minute. Available in two width versions, the Super Wrap 650 and 950 allow clearances of 25" and 37" respectively.

As the last link of the production chain, Kalfass products hold a particular

significance. Maximum availability and trouble free operation of the packaging unit are a determining factor in the successful operation of the entire production process. The Super Wrap Deluxe Inline is a machine you can rely on in demanding production conditions.

This system also provides:

- Flexible integration in the fully automatic production line.
- Maintenance free, continuously heated and thermostatically controlled sealing system.
- Seal bar equipped with optoelectronic

safety device to protect sensitive products and ensure optimum operating safety. The standard specification also includes a PLC and easily accessible operating elements.

In conjunction with the latest technology, the HV Shrink Tunnel, the Super Wrap Deluxe Inline is capable of achieving fully enclosed packs with a side fusion seal, while maximizing film savings.

**Kalfass**  
Packaging Machinery