

SEAL-A-TRUIT CORPORATION™



AUTOMATIC L-BAR SEALER

SEGMENT 3

AS-1722

#707 / 2-07

Standard Sealer Features:

- Plugs into 120 Volt, 15 Amp.
- Variable Speed, Soft Start, Product Staging
- Auto-Reverse for tall Products
- Digital PLC with 6 inch Color Touch Screen
- 4 ea 24 Volt, Brushless DC Motors
- Motorized Center Seal Adjustment
- Recipe driven Menu for repeatability of Jobs
- Horizontal & Vertical Product Sensors
- HI-Temperature Coated Steel Seal-Knives
- Powder Coated Metal Surfaces
- Easy Accessible & Visible Scrap Wind with Dancer Bar & Proximity Shut-Off Switch

Quality
PREMIUM MACHINERY
at a Reasonable PRICE!

**BUILT FOR
SERIOUS
Performance**



AUTOMATIC L-BAR SEALER

Technical Specifications:

Model No.: **AS-1722C** Auto L-Bar Sealer

Seal Area: **17" x 22" x 5" High**

Power Requirements: **120 VAC - 11 AMP**

Shipping Size (on Pallet): **83"L x 48"W x 74H"**

Shipping Weight: **1200 LBS**

Model No.: **AS-1722AC** Auto L-Bar Sealer

Seal Area: **17" x 22" x 7" High**


Power Requirements: **120 VAC - 11 AMP**

Shipping Size (on Pallet): **83"L x 48"W x 74H"**

Shipping Weight: **1200 LBS**

Clean & Dry Compressed Air Required on all Models: 80 -100 Lbs. @ 5-6 CFM

Machine
Foot-Print

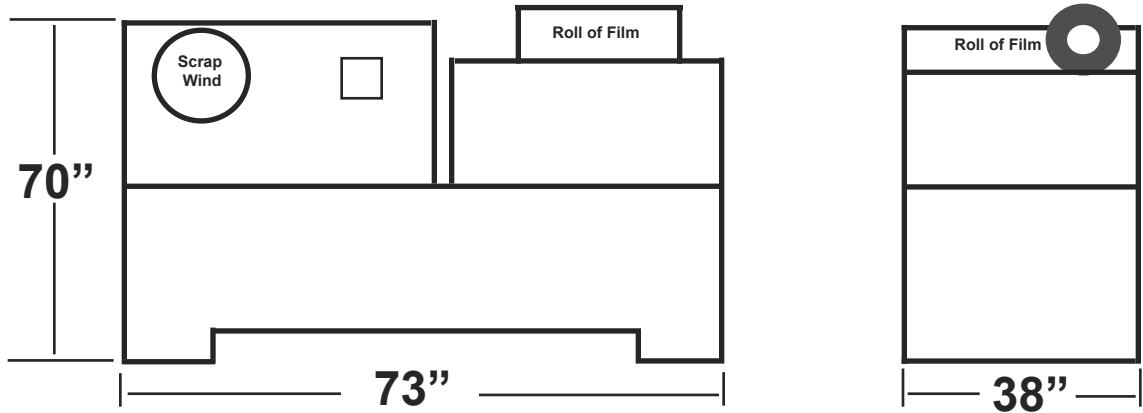

● This simple Automatic L-Bar Sealer is the perfect inexpensive step into Automation. The Heavy Duty Sealing Blades are coated with a Hi-Tech durable Anti-Stick Coating to insure long life and strong Seals. **SEAL-A-TRON™** is proud to offer "Powder Coating" on all machines; the most durable paint finish the industry offers. The latest Technology PLC with a 6" Color Touch Screen allows absolute control of all machine functions.

● The most innovative feature of these machines are the "American Made" 24 Volt DC Brushless Motors. The next best thing to "Servo Motors", they allow us to offer variable speed, soft start control and dynamic breaking as standard features. With the combination of innovative technology and **SEAL-A-TRON™** "Know-How", we have achieved a significant increase in Speed and Performance over Competitors.

DLC-1854
Drop-Lug Conveyor



● Each application is different, and in many situations a separate Infeed Conveyor is needed to properly space your product to eliminate product jams. Some applications are calling for a Drop-Lug Indexing Conveyor, however in most cases a standard Belted Indexing Conveyor will suffice. **SEAL-A-TRON™** offers standard Stand-Alone Conveyors, that are controlled by the Automatic Sealer with a communication cable.

• **SEAL-A-TRON™** •

"Quality Second to None at a Price You CAN Afford"



Seal-A-Tron Corporation™ • 3815 S.E. Naef Road. • Portland, OR 97267 • Phone (503) 652-5200 • Fax (503) 905-1331

Visit us on the Internet at: <http://www.seal-a-tron.com>