

# SEAL-A-TRON

CORPORATION™

SEGMENT 1

## OCONO™ SHRINK SYSTEM

### L-BAR SEALER

#### *Standard Features:*

- Aluminum Extruded SEAL-HEAD
- Ceramic Beads for SEAL WIRE backing
- MAG-LOK™ Sealing Magnet, Film Clamps
- TRU-TEMP™ Seal Wire Control
- EZ-PERF™ Venting System w/POSI-GUIDES™
- Telescoping Product Discharge Conveyor
- Stand-Alone ADJUSTA™ Stand or Unitized "Combo ADJUSTA™ Stand"

### SHRINK TUNNEL


#### *Standard Features:*

- KOOL-TUCH™, SURROUND AIR™
- 5/8" Diameter Live Rollers  
(GFN Belt Optional)
- COOL-DOWN Cycle for extended component life
- JAM-SAFE™ with "Torque Clutch"
- Solid State Temperature Controller with Solid State Power Switching
- Stand-Alone ADJUSTA™ Stand or Unitized "Combo ADJUSTA™ Stand"

#207 / 2-07



OS-1620 and OT-1910-30  
On Individual Console Stands

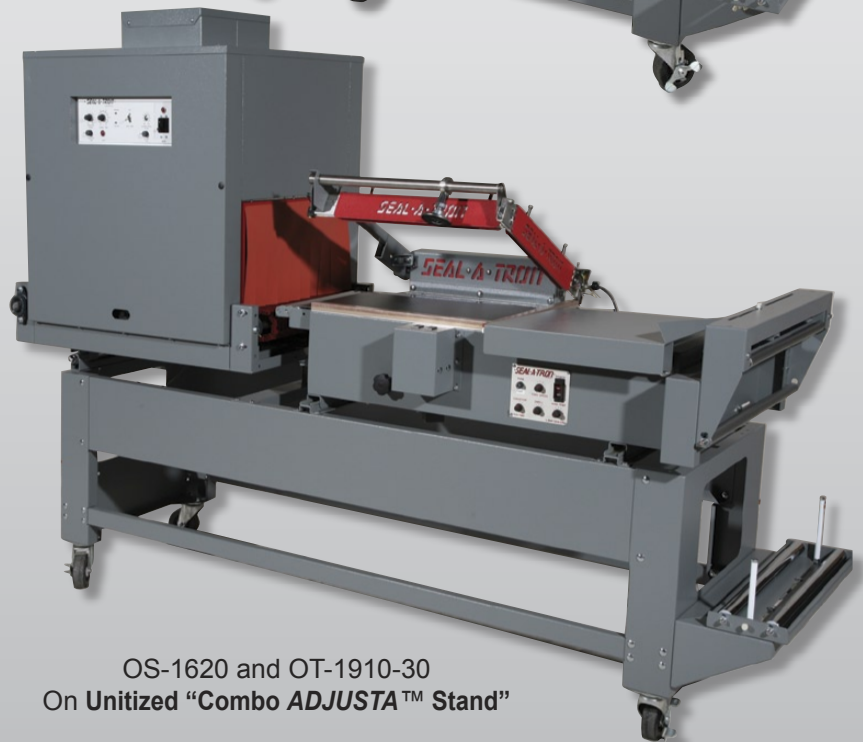

OS-1620 and OT-1910-30  
On Unitized "Combo ADJUSTA™ Stand"

*The Quality of*  
**PREMIUM MACHINERY**  
at an **OCONO™** price!

**BUILT FOR  
SERIOUS  
Performance**




Versatility and Performance with Lots of Features

# OCONO™ Shrink System

## Technical Specifications:

MODEL NO.:	OT-1910-30 Shrink Tunnel	MODEL NO.:	OS-1620 L-Bar Sealer
CHAMBER DIMENSIONS:	19"Wx10"Hx30"L	SEAL AREA:	16" x 20"
POWER REQUIREMENTS:	208/240VAC - 18/24AMP	POWER REQUIREMENTS:	120VAC - 11 AMP
MACHINE SIZE:	37L" x 30W" x 70H"	MACHINE SIZE:	58L" x 30W" x 54H"
SHIPPING WEIGHT:	500 LBS	SHIPPING WEIGHT:	350 LBS
SHIPPING SIZE (on Pallet):	43L" x 34W" x 73H"	SHIPPING SIZE (on Pallet):	62L" x 30W" x 52H"

SHIPPING SIZE for Unitized Combo *ADJUSTA™* Stand: 98L" x 40W" x 74H" • SHIPPING WEIGHT: 880 LBS

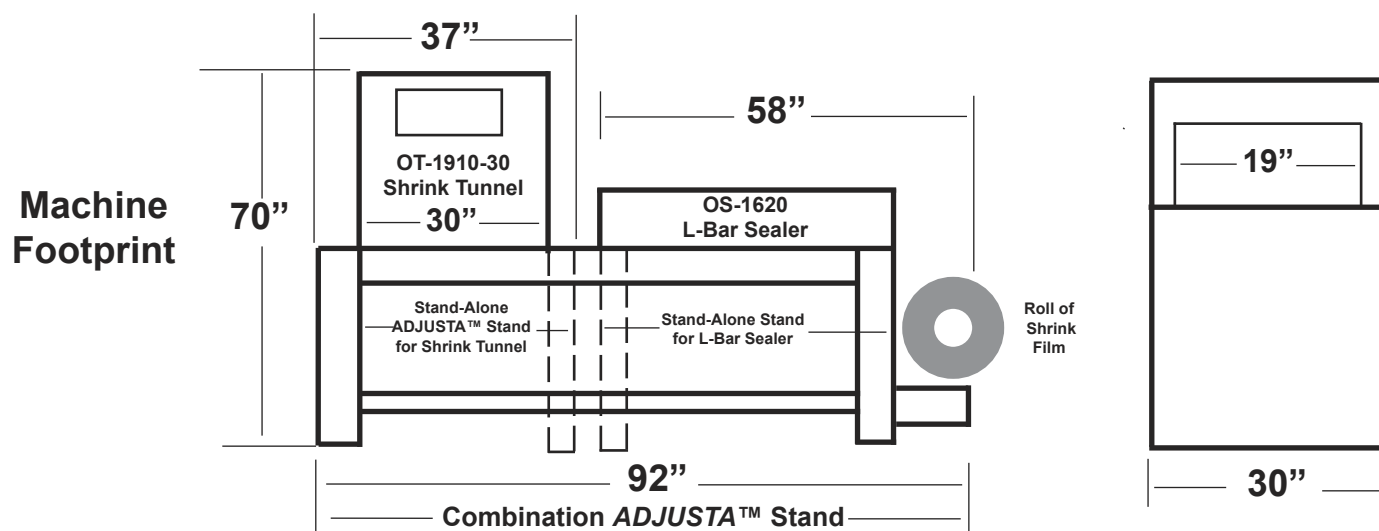

● OS-1620: **SEAL-A-TRON™ OCONO™** SERIES L-Bar Sealers have been carefully designed for Maximum Flexibility, accommodating a greater Product Mix. This machine is ideal for cost-conscious users who still demand an Industrial Strength Machine. Standard equipment for this Series includes **SEAL-A-TRON's™** Heavy Duty Seal Bar Extrusion, Powerful Magnets, and our proven **TRU-TEMP™** Impulse Seal Wire Control. The **OCONO™** OS-1620 L-Bar Sealer also features an Easy-Load Film Dispenser and a high quality Product Discharge Conveyor with our **POSI-TRACK™** Belt Tracking System. Film Clamps and **EZ-PERF™** Film Venting Device is standard on all **OCONO™** L-Bar Sealers. These durable Features truly set **SEAL-A-TRON™** apart from the Competition.

● OT-1910-30: The SHRINK TUNNEL features **KOOL-TUCH™**, our unique Innovation, keeping the Outside of the TUNNEL COOL to the touch while our **SURROUND AIR™** shrinks your Product perfectly every time. A durable Heavy Duty Blower Motor and **COOL-DOWN** Cycle make the **OCONO™** Shrink Tunnel truly an exceptional Value. Standard SHRINK TUNNEL Conveyors are equipped with **VARI-SPEED™**, Live Roller Conveyor with 1/2" diameter Silicone covered Rollers, Heavy Duty Bearings and a beefy Durable DC Gear Motor to assure long Life with minimal Maintenance.

● **SEAL-A-TRON™** is pleased to present the unique Combination **ADJUSTA™** Stand allowing to align the L-Bar Sealer with the Shrink Tunnel for safe Product transfer. This also allows the Transport of the machines as a **Unitized System** within your plant. When ordering machines from **SEAL-A-TRON™** or your local distributor, a Stand-Alone or a Unitized System may be chosen at no extra charge.

• SEAL-A-TRON •

"Quality Second to None at a Price You CAN Afford"



Seal-A-Tron Corporation™ • 3815 S.E. Naef Road. • Portland, OR 97267 • Phone (503) 652-5200 • Fax (503) 905-1331

Visit us on the Internet at: <http://www.seal-a-tron.com>