

SEAL-A-TUNN

CORPORATION™

SEGMENT 2

PRODUCTION T-3613-64 SHRINK TUNNEL

SHRINK TUNNEL *Standard Features:*

- SURROUND AIR™
- KOOL-TUCH™ Exterior is safe to Touch
- ADJUSTA™ Stand with Locking Casters
- Solid State Temperature Controller with Solid State Power Switching
- Cool-Down Cycle for extended Component Life
- Baffles on the Bottom and both sides to Control the Air Flow
- Pre-Shrink Zone in Infeed Area
- JAM-SAFE™
- Heavy Duty Welded Frame with Locking Casters
- Emergency Safety Circuit

SHRINK TUNNEL *Optional Features:*

- VARILOCETY™ Variable Blower Speed
- GFN, Glass Filled Nylon Belt
- Close Roller Spacing
- Long Life TFE Covered Rollers
- Secondary Cooling Fan for Poly
- TPF, Thin Package Fixture
- Tunnel Height Enlargement



Oversized
SHRINK TUNNEL
with unique Baffling System
and ADJUSTA™ STAND


BUILT FOR
SERIOUS
Performance



T-3613-64 SHRINK TUNNEL

Technical Specifications:

Model:	T-3613-64
Tunnel Chamber:	36"W x 13"H x 64"L
Power Requirements:	208/240 VAC - 45/50A 3 PH
(Optional Wiring)	440/480 VAC - 30/35A 3 PH
Roller Diameter:	5/8" incl. Silicone Cover
Shipping Weight:	1500 lbs
Shipping Size:	62"W x 80"H x 89"L

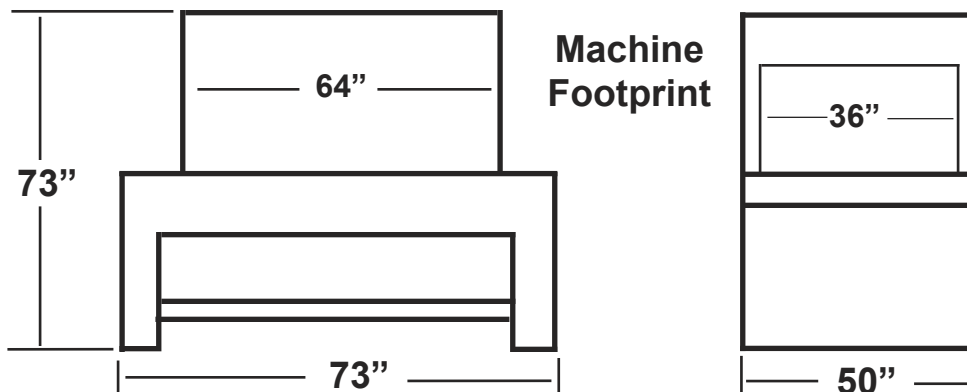

- We call our Thermal System "SURROUND AIR™". An exclusive Network that distributes Hot Air evenly to every square inch of your Package, producing a clean, uniform shrink on every side - including the bottom. This Production Shrink Tunnel features a special Pre-Shrink section in the entrance of the Tunnel Chamber, allowing the Bottom of the Package to be shrunk first. This is helpful to arrange your Package Seals closer to the bottom of the Package. A unique Baffling System enables the Operator to adjust the Air Flow on the bottom and the sides of the Tunnel to get better shrink results and allow even light Packages to pass through the Chamber.


- High wattage 3" diameter coiled long life Calrod Heaters heat quickly and recover rapidly between the ON/OFF cycle. A Solid State Temperature Controller with Solid State Power Switching regulates the Tunnel Heat reliably to $\pm 2^\circ\text{F}$. When the machine is turned off, the cool-down cycle engages, disconnecting the Heaters while the Conveyor and Blower continue to run until the Tunnel Chamber Temperature has reached a safe level assuring long Component Life.

- The Heavy Duty Variable Speed DC Motor pulling 1/2" diameter Rollers on a heavy duty #40 x 3/4 D3 Pin Chain. Our standard Silicone Rubber covered Rollers may be replaced with long life TFE Teflon Covers. A GFN "Glass Filled Nylon" belt is available for specific Applications.

- "KOOL-TUCH™" By isolating the Interior Walls from the Outside Walls, we achieved a substantially cooler Tunnel Exterior! All Exterior Parts of the Tunnel are cool to the Touch.

- The unique "ADJUSTA™" Stand allows the Operator to level the Infeed Height of the Tunnel with the Discharge Height of the Product Take-Away Conveyor of the Sealer.

(Optional)
GFN,
Glass Filled
Nylon Belt

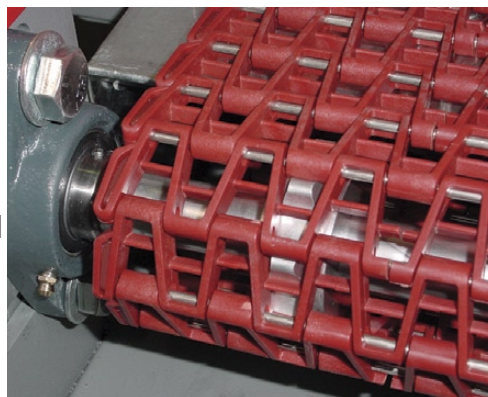

Option:

VARILOCETY™: Featuring a quiet 2 HP three Phase Blower Motor, adjustable from 1000 - 3000 rpm. This variable Speed Control of the Large Squirrel-Cage Fan allows for Perfect Air Flow Control to reduce "Dog Ears" and "Crows Feet."

• SEAL-A-TRON •

"Quality Second to None at a Price You CAN Afford"



Seal-A-Tron Corporation™ • 3815 S.E. Naef Road. • Portland, OR 97267 • Phone (503) 652-5200 • Fax (503) 905-1331

Visit us on the Internet at: <http://www.seal-a-tron.com>