

Battery-Operated Tools


For plastic strapping

Battery-Operated Tension-Weld®

The BXT2 combination tool applies polypropylene or polyester strapping, utilizing friction weld joint technology to join strap ends and automatic weld function which speeds up cycle time. The battery-operated BXT2 has a simple two-button process and ergonomic design to reduce operator fatigue.



BXT2-16, BXT2-19



BTS*



PT*



Rechargeable battery pack

Model	Part Number	Strap Type Contrax, Tenax	Joint Type	Applied Tension	Description	Shipping Weight	
						lbs	kg
BXT2-16	428340	9-13 mm Contrax & Tenax 1816, 1818, 1822 (with Guide change); 816, 818, 2030, 2040, 2040H	Tension-Weld	Up to 450 lbs	Battery	9	4.1
BXT2-19	428350	2040, 2040H, 2220, 2225		Up to 750 lbs		9.3	4.2
BTS-16/PT-16 COMBO	427100	2030, 2040, 2220, 2225, 2480, 10050	Tension-Weld	Up to 800 lbs.	Battery	(BTS) 6.8 (PT) 4	3 1.8
BTS-19/PT-19 COMBO	427101						
BTS-25/PT-25 COMBO	427102						

* The BTS and PT tools can be ordered separately.

Dispensers

For plastic strapping



DD-1A

Floor model with straproller. Can be suspended overhead.



DF-15

For typical shipping room. Easily loaded.



DF-16A

Designed for use with high-strength polyester strapping.



DF-1-12D

For power equipment. Dancer arm and brake. Base sold separately (Part No. 024360).



DO-3D

Can be suspended from a wall or ceiling.

Strap Dispenser Model	Part Number	Strap Size		Straproller	Portable	Tool tray	Dimensions						Dispenser Weight	
		inch	mm				Height		Width		Length		lbs	kg
							inch	mm	inch	mm	inch	mm		
DD-1A	024520	7/16-1/2	10.5-12	•	•	•	41	1 041	12	305	25	635	48	22
DF-15*	273725	3/8-3/4	9-19.0	•	•	•	37-3/4	959	16	406	25	635	62	28
DF-16A	422300	5/8-3/4	15.5-19.0		•	•	38	965	18	457	28-1/2	724	62	28
DF-1-12D	031318	3/8-3/4	9-19.0				36-3/4	933	12-1/2	315	47-1/4	1200	97	44
DO-3D	024500	3/8-3/4	9-19.0	•			31	787	6-3/4	171	27-3/4	705	41	19

* Dispenser can be used with both steel and plastic strapping.

Pneumatic tool accessories


All new Signode pneumatic tools are supplied with a quick-disconnect plug. A filter and regulator are needed with all Signode pneumatic sealers. A filter-regulator-lubricator is needed with pneumatic tensioners and combination tools. These additional fittings and air hoses are available from Signode to help provide optimum operation.

Recommended air hose for pneumatic tools: 10' x 3/8" (3.0m x 9.5mm) i.d. (Part No. 008558) or 10' x 1/2" (3.0m x 12mm) i.d. (Part No. 424774).

Note: Use light hydraulic oil in lubricator, such as Non-Fluid Oil No. LS-1236 (Part No. 008556) or equivalent.

* These accessories are available through Signode Parts.

Filter-Regulator-Lubricator assembly (Part No. 173111)

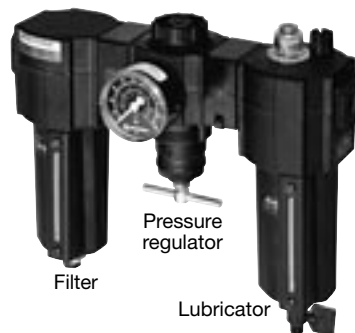

Filter

Pressure regulator

Lubricator



Regulator mounting bracket (Part No. 071982)



Quick-disconnect socket 3/8" (9.5mm) i.d. (Part No. 008569)*. Lubricator fitting for hose connection.



Quick-disconnect socket 1/4" (6.4mm) i.d. (Part No. 020706)*. Hose fitting for tool connection.



Quick-disconnect plug 1/4" (6.4mm) i.d. (Part No. 008568)*. Hose fitting for lubricator connection.



Quick-disconnect plug 1/4" (6.4mm) i.d. (Part No. 020704)*. Tool fitting for hose connection.



Y-fitting (Part No. 008574)* for operating two tools simultaneously.

Reducer Bushing 1/2" to 3/8" (not shown) (Part No. 071632)*.